

# **DISHWASHER SRC-3300ICA 220/60/3**

122/183 baskets per hour (up to 3.300 plates/hour)

P/N 1302628



### SALES DESCRIPTION

Enhanced washing + double rinsing. 2 speeds.

# FEATURES AND BENEFITS

- √ Fully stainless steel jacket.
- ✓ Inlet and outlet splash guards are standard.
- ✓ Stainless steel central rack feed system.
- Process cycles are divided by rubber curtains.
- ✓ Automatic cycle start.
- ✓ Economy
- Energy saving rinse supply switch.
- ✓ Pressure controller in the rinse section to limit consumption.
- ✓ Programmed automatic stops if there is no loading.
- ✓ Stop and freezing of timer when the limit switch actuates.
- Cleaning and maintenance
- √ Wide pivoting door allowing access for cleaning or inspection purpose.
- ✓ Detachable arms and dispersers for easier cleaning.
- $\checkmark$  Sloped removable stainless steel filters with independent removable basket.
- √ Easy boiler emptying by loosening a hose.
- √ Failures are easily detected thanks to the warning lights.
- ✓ Easy to repair without moving the machine.
- √ Washing
- ✓ Stainless steel wash arms and deep-drawn dispersers.
- Efficient and durable wash arm dispersers.
- ✓ Powerful, self-draining vertical wash pump.
- ✓ Easy to install detergent dispenser intake in washing tank. Rinsing
- ✓ Rinsing
- $\checkmark$  Stainless steel rinse arms and powerful, stainless steel, deep-drawn dispersers.
- $\checkmark$  Automatic boiler filling with no failure risk for heating elements.
- √ Temperature control with high precision probes.
- $\checkmark$  Visualization and adjustment of washing and rinsing temperatures in the digital display by pressing a button.
- ✓ Easy to install rinse aid dispenser intake in boiler.

### INCLUDES

- ✓ Inlet and outlet splash guards are standard.
- Extraction hood without motor CA.

# **Accessories**

- □ Drying units
- Manual water softeners
- ☐ Automatic water softeners
- ☐ 500 x 500 mm. baskets
- ☐ Inserts, supplements & similar
- Loading table for corner situation for rack conveyor dishwashers
- □ Central sorting tables
- ☐ Double connection central sorting table
- Single exit tables
- ☐ Roller conveyor and corner roller conveyor
- ☐ Machined curve
- CA Extraction hood
- □ EV Extraction hood with motor
- CV Extraction hood with steam condensation
- ☐ Connecting tables for Pass-Through dishwashers and rack conveyors
- ☐ Drying unit for corner situation













Project	Date
Item	Qty



# **DISHWASHER SRC-3300ICA 220/60/3**

122/183 baskets per hour (up to 3.300 plates/hour)

P/N 1302628

# **SPECIFICATIONS**

#### **Production**

✓ Production baskets/hour: 122 / 183 ✓ Production plates/hour: 2196 / 3294

#### Wash

√ Temperature: 55 °C - 65 °C

√ Wash tank capacity: 100 I

✓ Pump: 3.5 Hp / 2600 W

√ Wash heating element: 9000 W

#### Pre-rinse

✓ Temperature: 65 °C - 75 °C

✓ Pre-rinse basin capacity: 15 I

✓ Pump: 0.2 Hp / 150 W

✓ Pre-rinse heating element: 6000 W

#### Rinse

√ Temperature: 80 °C - 90 °C

√ Water consumption: 330 l/h

√ Rinse heating element: 18000 W

✓ Boiler capacity: 20 I

#### Drag

✓ Drag motor power: 0.25 Hp / 180 W

### (CA) output diameter: -- mm\_\_

Loading\_\_

✓ Total installed power: 30270 W

**Electrical supply:** -- V / -- Hz / -- ~ (-- A)\_\_\_

External dimensions (WxDxH)\_\_

√ Width: 2300 mm

✓ Depth: 829 mm

✓ Height: 1520 mm

Net weight: 410 Kg


Water Intake: 3/4 "


Drain diameter: 1 1/2 "

Noise level (1m.): 71 dB(A)

**Crated dimensions** 

3070 x 980 x 1645 mm

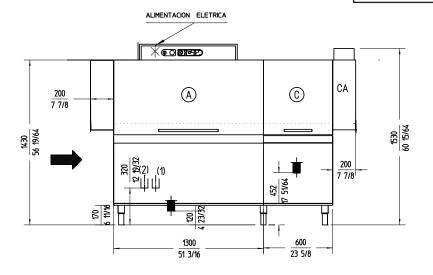





Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty